


USE MIL-H-5608 HYDRAULIC FLUID

SAFETY WIRE ALL DRILLED BOLTS

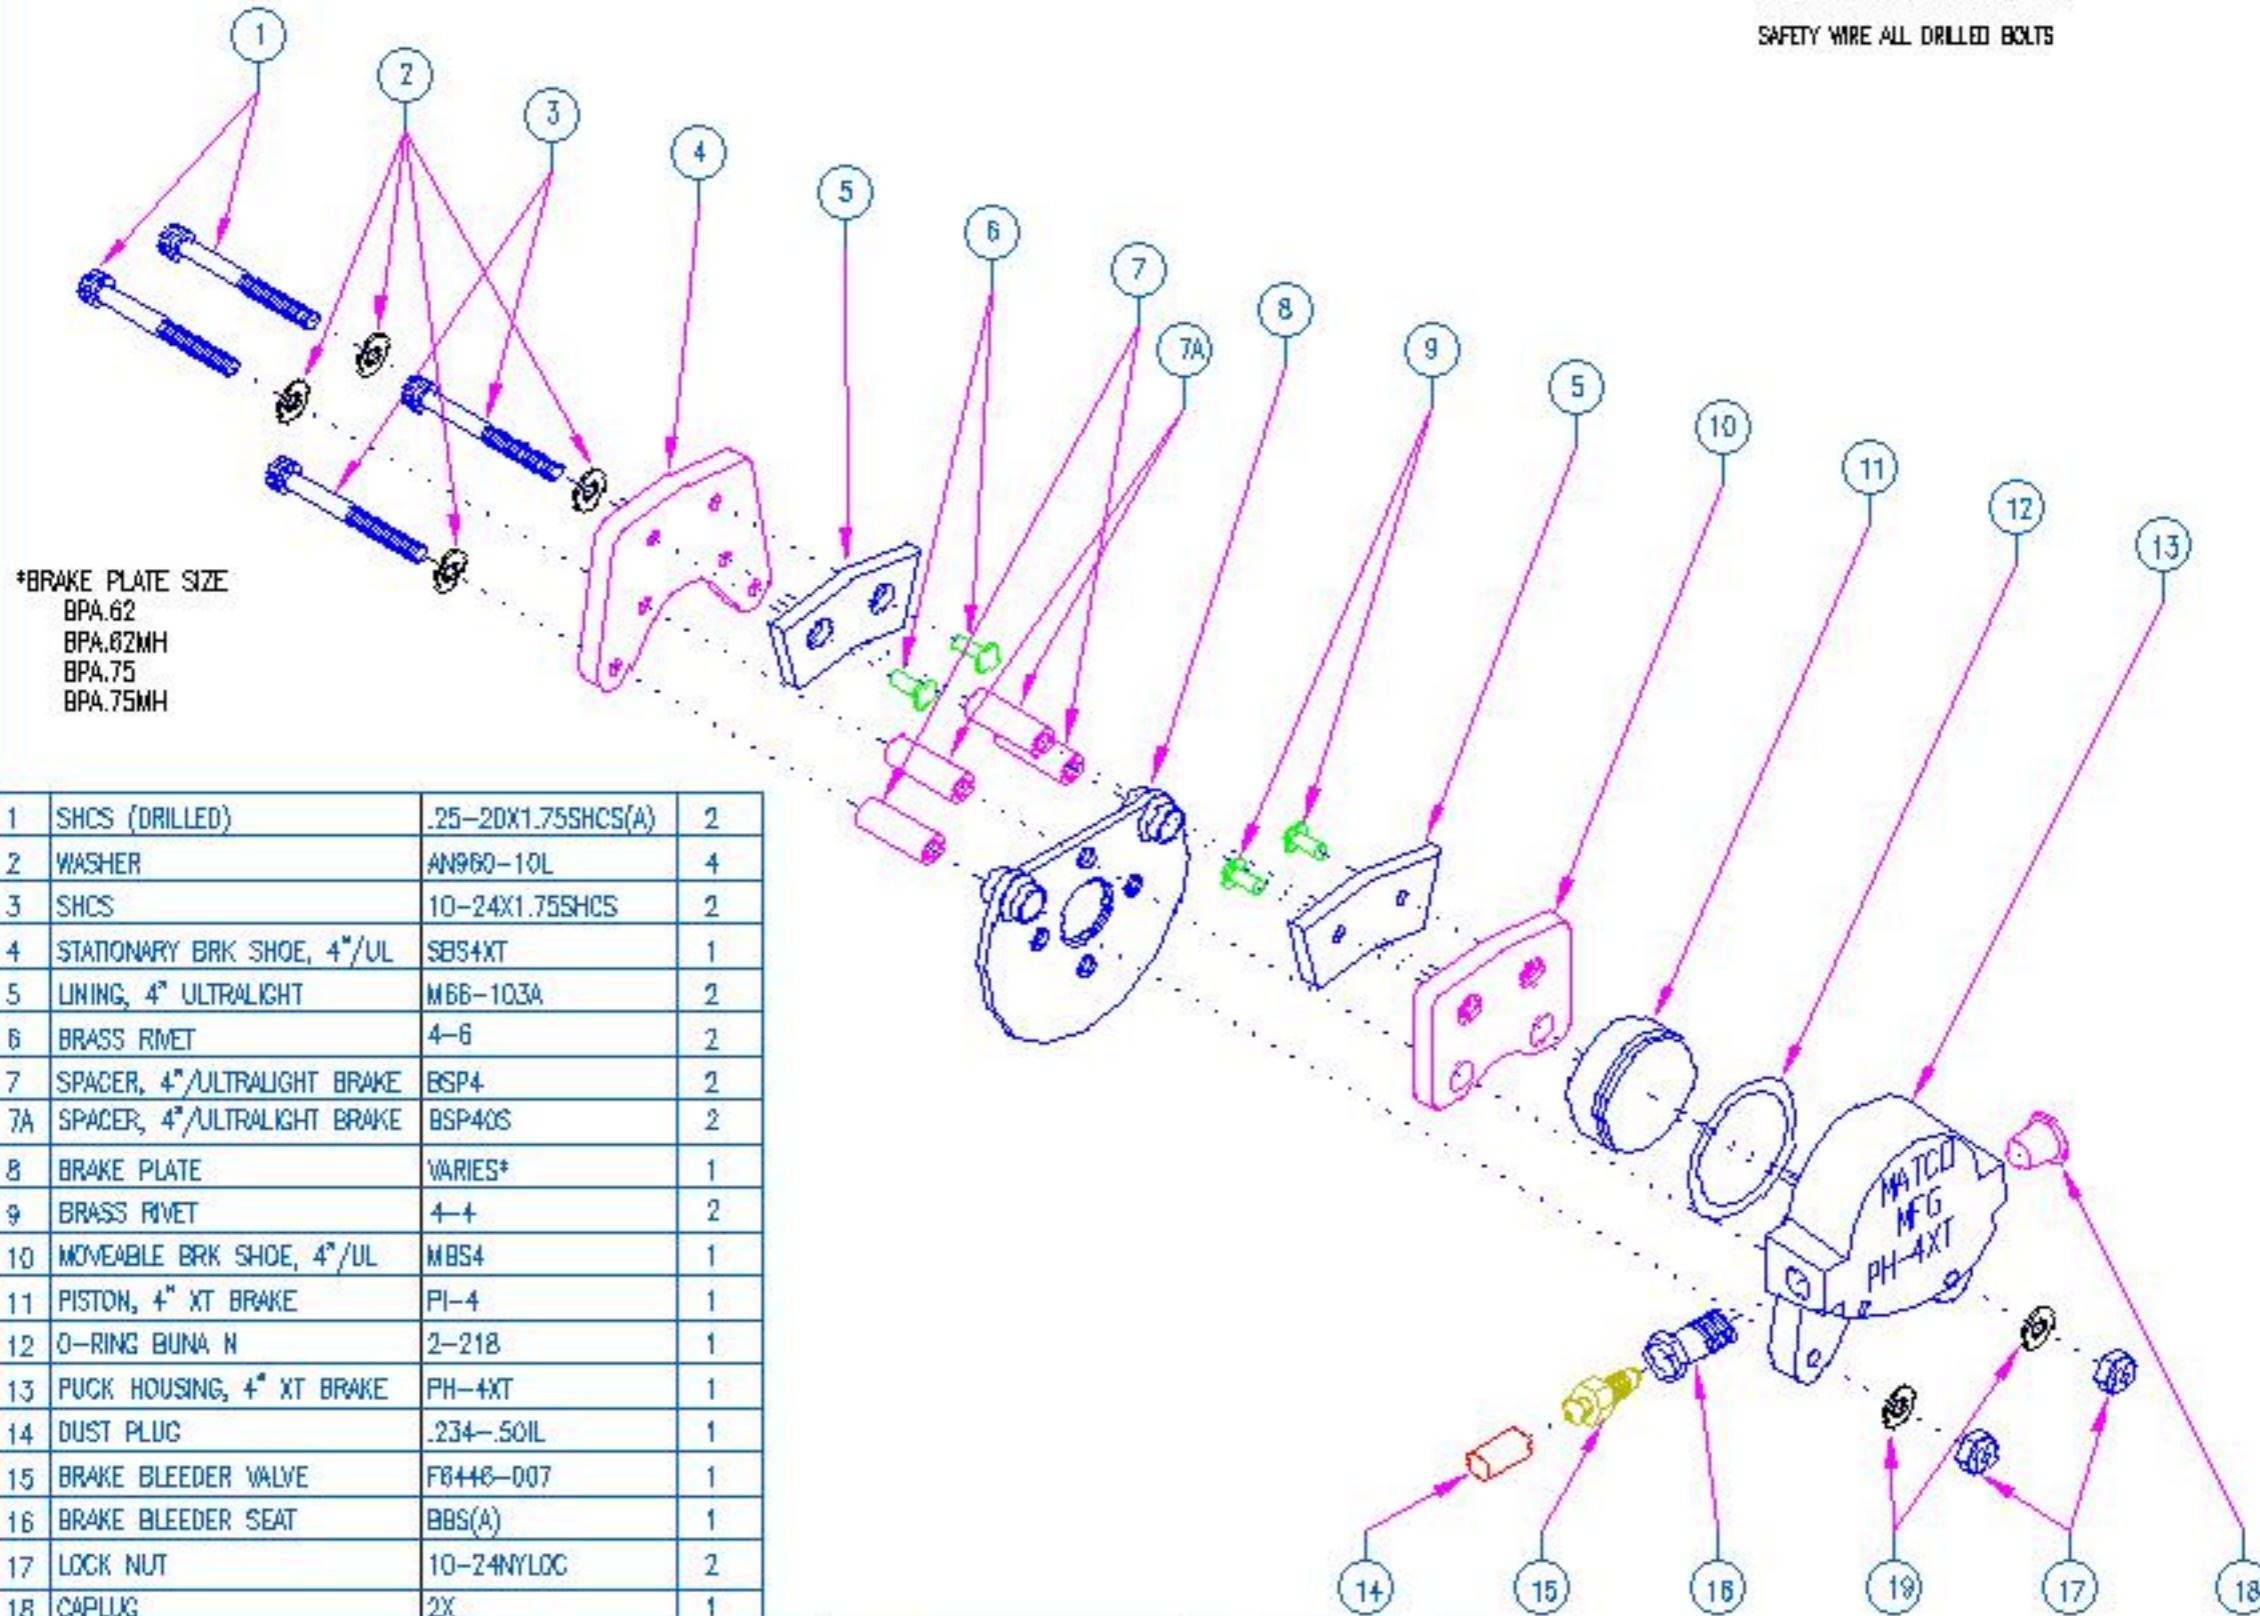

\*BRAKE PLATE SIZE  
 BPA.62  
 BPA.62MH  
 BPA.75  
 BPA.75MH

1	SHCS (DRILLED)	.25-20X1.75SHCS(A)	2
2	WASHER	AN960-10L	4
3	SHCS	10-24X1.75SHCS	2
4	STATIONARY BRK SHOE, 4"/UL	SB54XT	1
5	LINING, 4" ULTRALIGHT	M66-103A	2
6	BRASS RIVET	4-6	2
7	SPACER, 4"/ULTRALIGHT BRAKE	BSP4	2
7A	SPACER, 4"/ULTRALIGHT BRAKE	BSP4CS	2
8	BRAKE PLATE	VARIES*	1
9	BRASS RIVET	4-4	2
10	MOVEABLE BRK SHOE, 4"/UL	MBS4	1
11	PISTON, 4" XT BRAKE	PI-4	1
12	O-RING BUNA N	2-218	1
13	PUCK HOUSING, 4" XT BRAKE	PH-4XT	1
14	DUST PLUG	.234-.50IL	1
15	BRAKE BLEEDER VALVE	F8446-007	1
16	BRAKE BLEEDER SEAT	BBS(A)	1
17	LOCK NUT	10-24NYLOC	2
18	CAPPLUG	2X	1

NO.	PART NAME	INVENTORY NO.	REQ'D	19	WASHER	AN960-10	2
-----	-----------	---------------	-------	----	--------	----------	---

3-4BRAKE  
**MATCH mfg**  
 550W 3615 South  
 SALT LAKE CITY, UT 84115 (801) 488-7574

3D FOUR INCH XT BRAKE ASSEMBLY

DRAWN BY: G. HAPP  
 AUTHORIZED BY:

SCALE: NONE  
 DATE: OCTOBER. 3, 2002

REVISION:  
 1